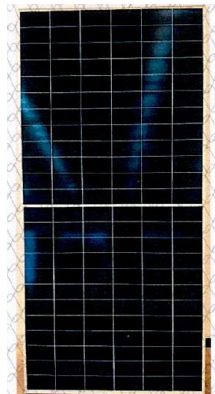


Prüfbericht-Nr.: Test report no.:	CN2595TJ 001	Auftrags-Nr.: Order no.:	326095767	Seite 1 von 7 Page 1 of 7
Kunden-Referenz-Nr.: Client reference no.:	2050703	Auftragsdatum: Order date:	19/02/2025	
Auftraggeber: Client:	LONGi Green Energy Technology Co., Ltd. No. 388, Middle Hangtian Road, Chang'an District, Xi'an, Shaanxi, P.R.China			
Prüfgegenstand: Test item:	Photovoltaic (PV) module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	See module type designation on page 3			
Auftrags-Inhalt: Order content:	Fire test of photovoltaic (PV) modules			
Prüfgrundlage: Test specification:	Photovoltaic (PV) modules Spread of fire test and Burning brand test according to UL 790			
Wareneingangsdatum: Date of sample receipt:	27/02/2025			
Prüfmuster-Nr.: Test sample no.:	See clause 6			
Prüfzeitraum: Testing period:	05/03/2025 - 06/03/2025			
Ort der Prüfung: Place of testing:	Refer to page 3			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	X <u>Zexuan Fang</u> Signed by: Zexuan Fang		genehmigt von: authorized by:	X <u>Shulong Yang</u> Signed by: Shulong Yang
Datum: Date:	14/03/2025		Ausstellungsdatum: Issue date:	14/03/2025
Stellung / Position:	Project Engineer		Stellung / Position:	Authorizer
Sonstiges / Other:	Samples fulfilled the requirement of Class A Spread of flame test and Class A Burning brand test according to UL790.			
				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN2595T J 001
Test report no.:

Seite 2 von 7
Page 2 of 7

Liste der verwendeten Prüfmittel
List of used test equipment

Prüfmittel <i>Test equipment</i>	Prüfmittel-Nr. / ID-Nr. <i>Equipment No. / ID-No.</i>	Nächste Kalibrierung <i>Next calibration</i>
Visualinspection platform	GF-24 WGCS-1	10/22/2025
Irradianceeililluminometer	GF-28 1010A	12/29/2025
steelmeasuringgttape	GF-171 TAJIMA	12/22/2025
Photovoltaic module combustiontest system	GF-112-1 SCF	05/12/2025
Electronic balance	GF-190 LBA-5200	09/12/2025
Mechanical stopwatch	GF-120803	09/12/2025
Hygrothermograph	GF-270-3 TH20R	09/12/2025
Handheld wind speedtester	GGF-112-21340	05/18/2025
Electrothermal blowing dry box	GF-112-8B1101-0A	03/04/2026

Prüfbericht-Nr.: CN2595T J 001
Test report no.:

Seite 3 von 7
Page 3 of 7

Produktbeschreibung
Product description

I	General										
1	Product details										
1.1	Module type designation With ½ cut of mono c-Si cells: LR7-72HVD-xxxM (xxx = 625-660, in steps of 5, 144 cells, Pmax@BNPI=684-722)										
1.2	Intended use PV modules are installed in the following special applications: <table border="1"> <tr> <td>Building attached PV (BAPV)</td><td> ☐ yes ☒ no </td></tr> <tr> <td>Building integrated PV (BIPV)</td><td> ☐ yes ☒ no </td></tr> <tr> <td>Applications in areas with snow and / or wind load exceeding loads as tested in UL 61730-2</td><td> ☐ yes ☒ no </td></tr> <tr> <td>Applications at environmental temperature exceeding the limits indicated in UL 61730-1</td><td> ☐ yes ☒ no </td></tr> <tr> <td>Other (please specify)</td><td> ☐ yes, as follows: ☒ no </td></tr> </table>	Building attached PV (BAPV)	☐ yes ☒ no	Building integrated PV (BIPV)	☐ yes ☒ no	Applications in areas with snow and / or wind load exceeding loads as tested in UL 61730-2	☐ yes ☒ no	Applications at environmental temperature exceeding the limits indicated in UL 61730-1	☐ yes ☒ no	Other (please specify)	☐ yes, as follows: ☒ no
Building attached PV (BAPV)	☐ yes ☒ no										
Building integrated PV (BIPV)	☐ yes ☒ no										
Applications in areas with snow and / or wind load exceeding loads as tested in UL 61730-2	☐ yes ☒ no										
Applications at environmental temperature exceeding the limits indicated in UL 61730-1	☐ yes ☒ no										
Other (please specify)	☐ yes, as follows: ☒ no										
2	Summary of test results Totally 1 set of PV modules listed in page 4 were subjected to the fire test of UL 790 and the results were passed according to the pass criteria requirements of UL 790. Test locations: Visual check was performed by TÜV Rheinland (Suzhou) Co., Ltd. Fire test (MST 23) was performed at China Testing & Certification International Group Co., Ltd., China Photovoltaic Product Test Center, which is located at No.1, South side of Yanmi Road, economic development zone, Miyun District, Beijing, P.R. China										

Prüfbericht-Nr.: CN2595TJ 001
Test Report No.:

Seite 4 von 7
Page 4 of 7

Absatz	Photovoltaic (PV) modules	Messergebnisse - Bemerkungen	Ergebnis
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Result

3	Test specification		
	IEC 61730-2:2023: Photovoltaic (PV) module safety qualification – Part 2: Requirements for testing-MST 23	applicable	—

4	List of test samples		
☒ The modules tested were taken at random from a production batch and subjected to manufacturer's normal quality control and inspection for safety testing			
☐ The modules tested were prototypes of a new design and not taken from a production batch.			
Module type: LR7-72HVD-640M			
Sample no.	Sample SN	Test sequence	Remarks / constructional characteristics (e.g. cell, backsheet, frame type)
1	LRE0041382410 01900076	Fire	Samples are Mono c-Si module with 144 pcs cells and Al-frame
2	LRE0041382410 01900084	Fire	
3	LRE0041382410 01900061	Fire	
Remark: N/A			

5	Overview of tests and test results		
----------	---	--	--

Test	Remarks	Result
Visual inspection (initial) – MQT 01	See table 6	P
Fire test (UL 790)	See table 7	P

Prüfbericht-Nr.: CN2595TJ 001
Test Report No.:

Seite 5 von 7
Page 5 of 7

Absatz	Photovoltaic (PV) modules	Messergebnisse - Bemerkungen	Ergebnis
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Result

6.1	Visual inspection (initial) – MQT 01		
Test date (dd/mm/yyyy)		05/03/2025	—
Sample no.	Requirement	Nature and position of initial findings	
1	No major visual defects	No major visual defects	P
2		No major visual defects	P
3		No major visual defects	P
Supplementary information: N/A			

7	Fire test – MST 23 (acc. to UL 790)				
7.1	Spread of flame test				
Test date (dd/mm/yyyy)		06/03/2025		—	
Sample no.		1, 2			
Fire class test specification		A			
Test results					
Did any portion of the module blow off or fall off the test deck in the form of flaming / glowing brands?		☐ Yes	☒ No	P	
Did any portion of the roof desk fall away in the form of glowing particles?		☐ Yes	☒ No		
Was the flame spread beyond 1.82m for Class A, 2.40m for Class B or 3.96m for Class C?		☐ Yes	☒ No		
Was there a significant lateral spread-of-flame from the path directly exposed to the test flame?		☐ Yes	☒ No		
Supplementary information: N/A					

7.2	Burning brand test				
Test date (dd/mm/yyyy)		06/03/2025		—	
Sample no.		3			
Fire class test specification		A			
Test results					
Did any portion of the module blow off or fall off the test deck in the form of flaming / glowing brands?		☐ Yes	☒ No	P	
Did any portion of the roof desk fall away in the form of glowing particles?		☐ Yes	☒ No		
Did the brand burn a hole through the roof covering or through any part of the module?		☐ Yes	☒ No		
Did any sustained flaming of the module occur?		☐ Yes	☒ No		
Supplementary information: N/A					

Prüfbericht-Nr.: CN2595TJ 001
Test Report No.:

Seite 6 von 7
Page 6 of 7

Absatz	Photovoltaic (PV) modules	Messergebnisse - Bemerkungen	Ergebnis
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Result

7.3	Fire type classification result		
Module type		Mono c-Si Module	
Module dimension [mm]		2382 × 1134 × 30	
Thickness of front cover (superstrate) [mm]		2.0 mm	
Thickness of back cover (substrate) [mm]		2.0 mm	
Material of back cover (substrate)		Glass	
Frame material		Aluminum alloy	
Best passed class of Spread of flame test		Class A	
Best passed class of Burning brand test		Class A	
Supplementary information: Above information is provided by client.			

ANLAGE zum Prüfbericht-Nr.: CN2595TJ 001
APPENDIX to test report no.:

Seite 7 von 7
Page 7 of 7

FOTO-DOKUMENTATION
PHOTO DOCUMENTATION

Appendix: Photos

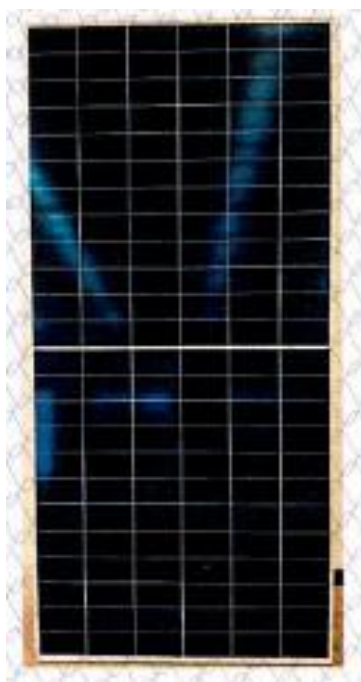


Fig. 1: Front view of test sample



Fig. 2: Rear view of test sample

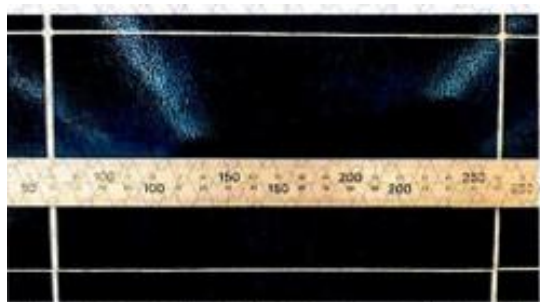


Fig. 3: Detail view of solar cell



Fig. 4: Detail view of closed junction box